


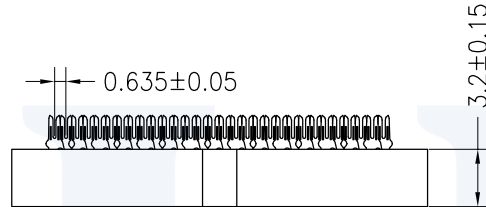





SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PBT
 Max.Processing Temp: 180°C for 30-60 seconds
 (200°C for 10 seconds)

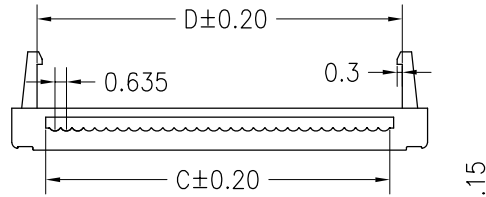


Pin	Dimension mm			
	A	B	C	D
06	8.00	2.54	4.20	5.30
08	9.27	3.81	5.47	6.57
10	10.54	5.08	6.74	7.84
12	11.81	6.35	8.01	9.11
14	13.08	7.62	9.28	10.38
16	14.35	8.89	10.55	11.65
18	15.62	10.16	11.82	12.92
20	16.89	11.43	13.09	14.19
24	19.43	13.97	15.63	16.73
26	20.70	15.24	16.90	18.00
30	23.24	17.78	19.44	20.54
34	25.78	20.32	21.98	23.08
40	29.59	24.13	25.79	26.89
44	32.13	26.67	28.33	29.43
50	35.94	30.48	32.14	33.24
60	42.29	36.83	38.49	39.59
64	44.83	39.37	41.03	42.13
68	47.37	41.91	43.57	44.67
80	54.99	49.53	51.19	52.29
100	67.69	62.23	63.89	64.99

Ordering Information

5332 XX U P G0 B W 03

No. of Pins
6~100P

Contact Plating
G0:Gold Flash

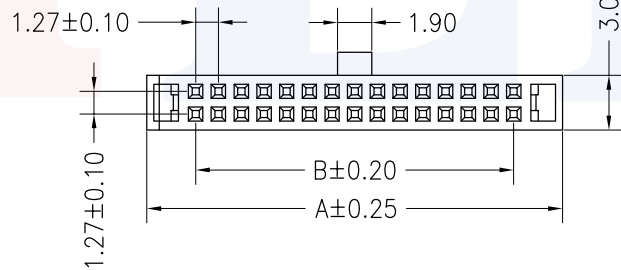

OPERATION		DRAW	YiYuSheng	20.05.04	SCALE	FIT
X.X	±0.30					
X.XX	±0.20	CHECK			UNIT	mm
X.XXX	±0.10				SIZE	A4
Angle	±3°	APPROVE			SHEET	1/1
DIM	TOL				PROJ.	☉

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONIC CO.,LTD
 Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.05.04	NEW DRAWING	

PART NO.	5332XXUPG0BW03
TITLE:	1.27 FC NPin(加厚中盖带缺)