





HSF RoHS

**SPECIFICATIONS
PERFORMANCE**

Electical Rating: AC/DC 50V 0.5A
 Contact Resistance: 80mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstand Volt: 500V AC/minute
 Opratng Temperature: -40°C to +105°C

Material

Contact: Phosphor Bronze Gold-Plated
 Locating Plate: Brass Sn Over Ni
 Housing: LCP UL94V0
 Max.Processing Temp: 260°C ± 5° 5S

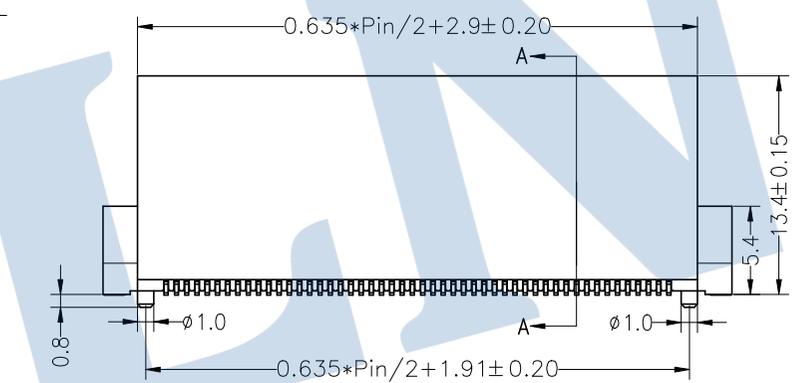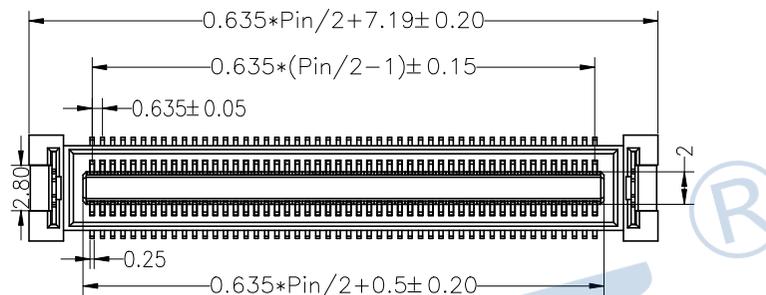

20~60P		0.12
>60P		0.15

Ordering Information

3724 M XXX 134 XX X X 0X

- F=Female
M=Male
- No.of pins
20P~100P
- Plastic Hight
134=13.4mm
- Contact Plating
G0:Gold Flash
G1:3U" Gold
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
S0:1.5U" Gold/Tin
S1:3U" Gold/Tin
- Insulator Material Option
D=BK-PA46
E=BK-PA9T
F=BK-LCP
- Packing
T:Tube
R:Reel

P.C.B Layout

				OPERATION		DRAW	RICH LIN	22.07.08	SCALE	FIT	JILN ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5992	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3724MXXX134XXXX0X
				X.XXX	±0.10				SHEET	1/1	TITLE:	0.635mm 浮动式BTB NPin H13.4 Male
A0	2022.07.08	NEW DRAWING		Angle	±3°	APPROVE						
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							