

**HSF RoHS**



**SPECIFICATIONS**

Housing: Thermoplastic,UL94V-0 (PBT)  
 Color: Black  
 Contact:Copper Alloy  
 Shell:Zinc Alloy  
 Voltage Current Rating:1.0AMP.250V AC  
 Insulation Resistance:500MΩ Min.  
 Contact Resistance:35mΩ Max.  
 Dielectric Withstanding Voltage:500V AC  
 Temperature Range:-55° C to +105° C

**Ordering Information**

**6321 M 050 S I XX MNA 0 X**

No. of Pins: 50P  
 Connector Type: R=Right Angle  
 Contact Plating:  
 S0:Gold Flash/Tin  
 S1:3U" Gold /Tin  
 S2:5U" Gold /Tin  
 S3:10U" Gold /Tin  
 S4:15U" Gold /Tin

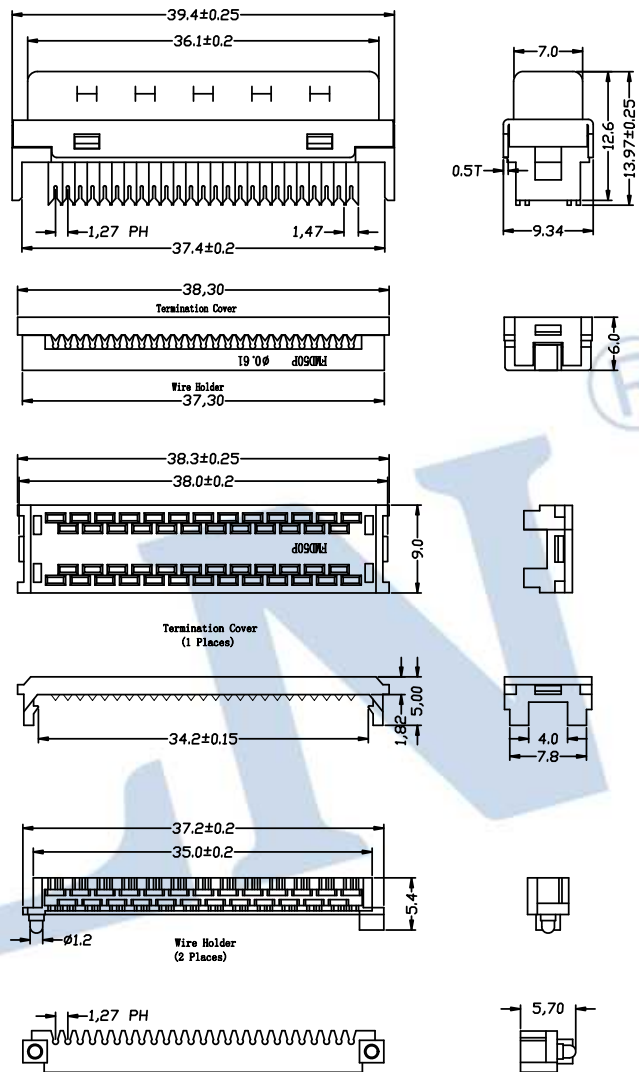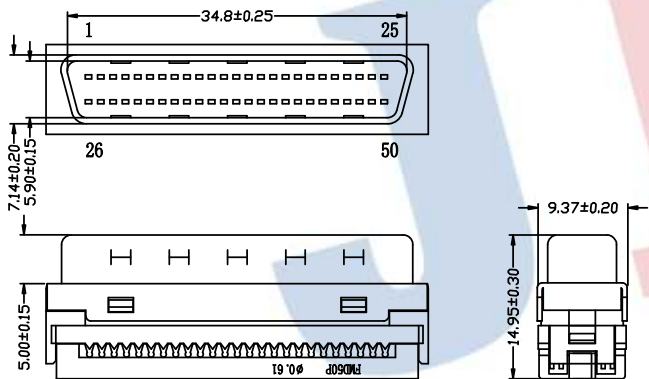

				OPERATION		DRAW	YANGHUIOU	2022.10.15	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	± 0.30				UNIT	mm		
				X.XX	± 0.20				SIZE	A4		
				X.XXX	± 0.10				SHEET	1/1		
				Angle	± 3°				PROJ.	☉		
A0	2022.10.15	NEW DRAWING		APPROVE				PART NO.	6321M050SIXXMNA0X			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL			TITLE:	SCSI DB 50P IDC ASSEMBLY TYPE		