



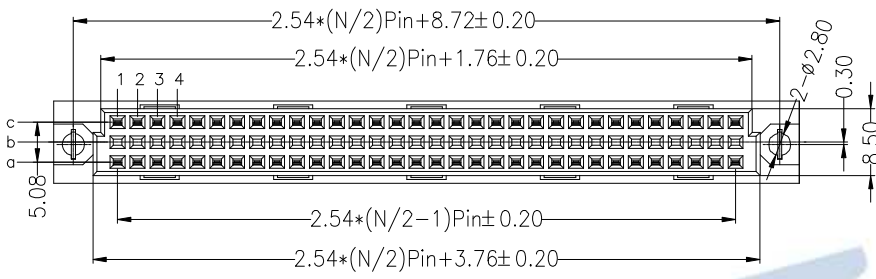




**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:30mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Copper Alloy  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Resistance To Soldering Heat:  
 245° C±5° C For 10 Second(PBT insulator)

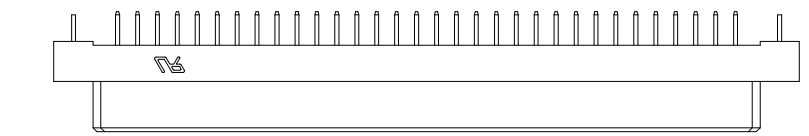

注: 缺b排

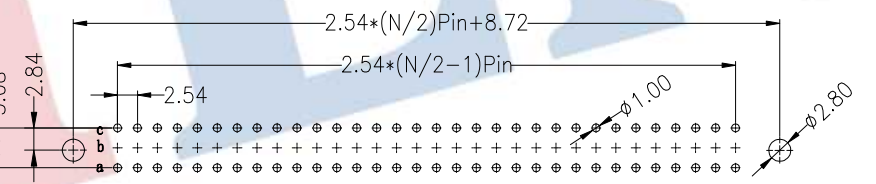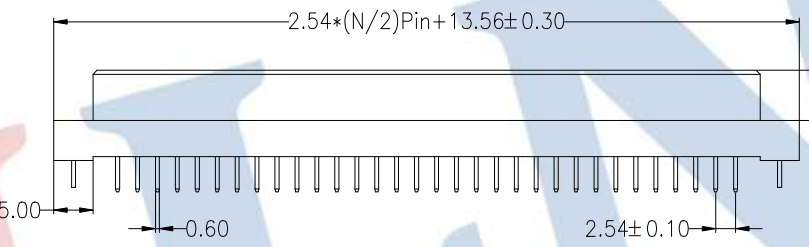

**Ordering Information**

**35113 XX C F S XX X W A X**

No. of Pins NPin N=20、32、64  
 Contact Type F=Female  
 Contact Plating G0:Gold Flash S0:Gold Flash/Tin S1:3U" Gold/Tin S2:5U" Gold/Tin S3:10U" Gold/Tin S4:15U" Gold/Tin S5:30U" Gold/Tin  
 Contact Material B=Brass P=Phosphor Bronze  
 Stream Code

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

Dimension antitheses list	
ITEM	A
Standard	4.00

A	AO	2023.03.29	NEW DRAWING	CHANGE	OPERATION	DRAW	Jelly Feng	2023.03.29	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	PART NO.	35113XXCFSSXXWAX				
	REV	DATE	MODIFICATION DESCRIPTION		X.X ±0.30	CHECK			UNIT	mm			SHEET	1/1	TITLE:	欧式插座 母座 180度 带鱼叉 缺b排 成品系列图	
					X.XX ±0.20	APPROVE			SIZE	A4				PROJ.		∅	
					X.XXX ±0.10				SHEET	1/1							
					Angle ±3°												
					DIM TOL												