HSF RoHS

NOTE:

1. Material:
   Housing: LCP Black;Thermoplastics,UL94V-0(Halogen free)
   Contact: Copper Alloy
   Shell: Copper Alloy
   Back Shell: Ferro Alloy
2. FINISH:
   Contact: Gold Flash Plated on Contact Area,
   80u" Min.Tin Plated on Solder Tails,
   50u" Min.Nickel Underplating Over All.
   Shell: 50u" Min.Nickel Underplating Over All.
3. Specification:
   3.1: Rating:
   Rated voltage:40V AC/DC. Rated current: 1.5 A Max.
   3.2: Electrical:
   Insulation Resistance: 100MΩ Min
   Contact Resistance: 30 mΩ Max
   Dielectric Withstanding Voltage: 500V/AC

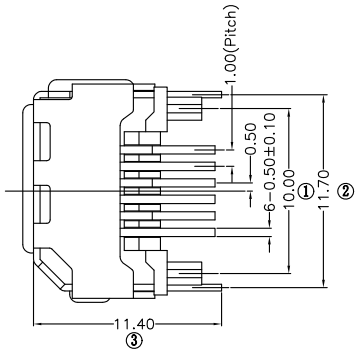



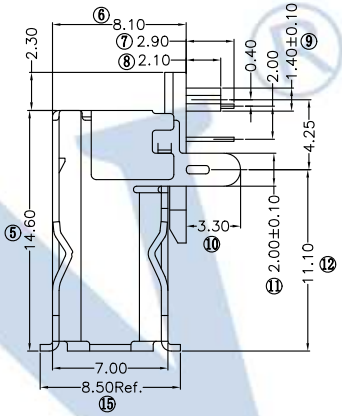

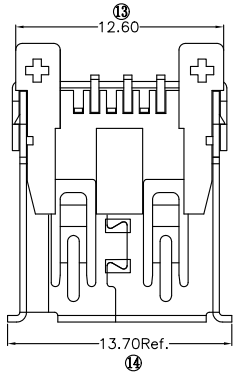

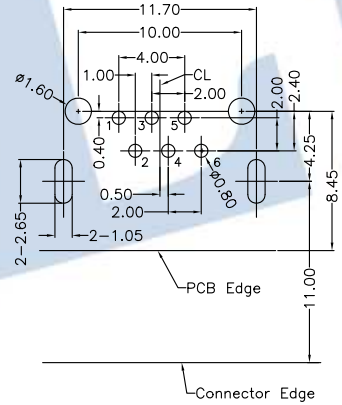



RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2014.03.28	NEW DRAWING	

OPERATION				
DRAW	yiyusheng	14.03.28	X.X	±0.30
CHECK			X.XX	±0.20
			X.XXX	±0.10
APPROVE			Angle	±3°
			DIM	TOL

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONICS CO.,LTD
Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	6312M-06RS0MA02
TITLE:	1394 6F 90° 反侧插 铜黑