
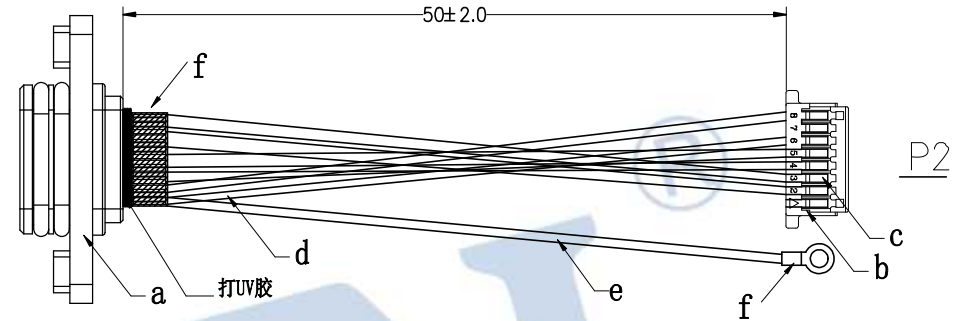


HSF RoHS

Note:

Current Rating: 1A max.
 Voltage Rating: 100 VAC.
 Insulation Resistance:>1000 MΩ at @500VDC
 Withstand Voltage:500VAC for 1 minute
 Contact Resistance: 10 mΩ MAX
 Operation Temperature:-40°C to +125°C
 Solder Temperature: 255~265° C for 5~10sec.

Contact Material:Copper Alloy
 Contact Plating: Au or Sn Over Ni
 Insulator Material: Synthetic Resin (UL94V-0) Black

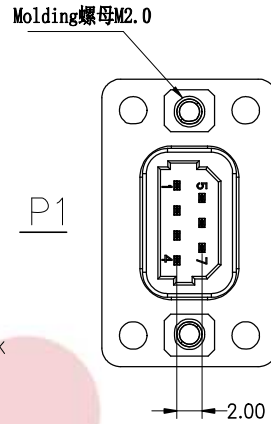

接线表

P1	颜色	P2
1	红色	1
2	黑色	2
5	蓝色	3
6	黄色	4
3	棕色	5
4	白色	6
	空	7
7	绿色	8
	绿色	圆环端子

f	圆环端子	RNB1. 25-3		1
e	线材	UL1571#24AWG	1	
d	线材	UL1571#28AWG	7	
c	端子	SH1.0-TE端子	7	
b	胶壳	SH1.0-8Y 胶壳	1	
a	电机编码器底座	伺服电机编码器焊线式底座7Pin Connector 开口型	1	
序号	物料名称	规格型号	数量	备注

		OPERATION		DRAW	Jelly Feng	2023.06.17	SCALE	FIT
		X.X	±0.30				CHECK	
		X.XX	±0.20	SIZE	A4			
A0	2023.06.17	NEW DRAWING		SHEET	1/1			
REV	DATE	MODIFICATION DESCRIPTION		CHANGE			PROJ.	带接地

JILN 深圳市锦凌电子有限公司
 SHENZHEN JINLING ELECTRONICS CO.,LTD
 Tel: 86-755-27483253 Fax: 86-755-2997-5588

PART NO.	6353-07BS1WA02
TITLE:	伺服电机编码器焊线式底座7Pin连接器/防呆型/带线+带接地