

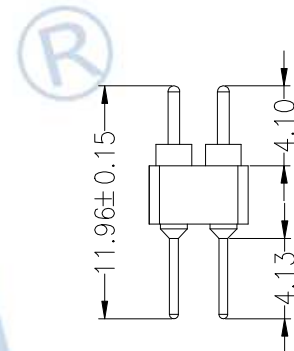


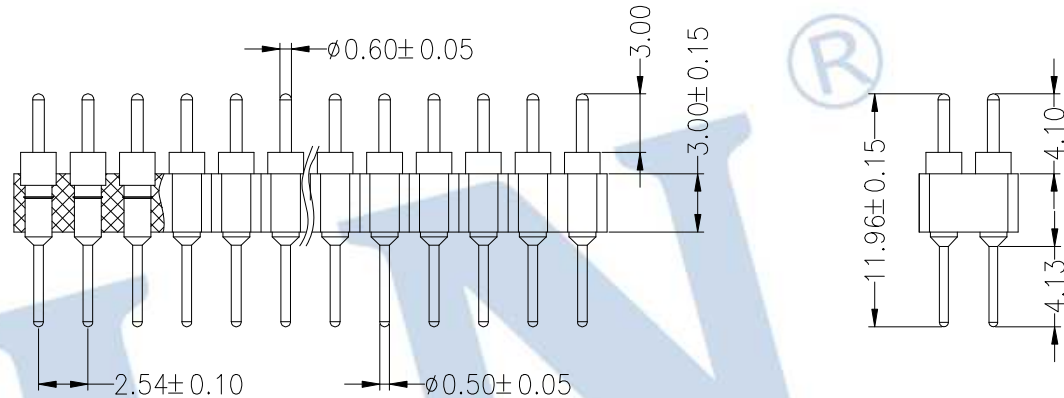

SPECIFICATIONS

Current Rating:3.0AMP
 Contact Resistance:10mΩ Max
 Dielectric Strength:Min 1000V AC RMS
 Operation Temperature:-40°c to +105°c

Contact Material:Brass
 Contact Plating:Au Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PPS
 Soldering Temperature:260°C±5°C For 5~10 Second

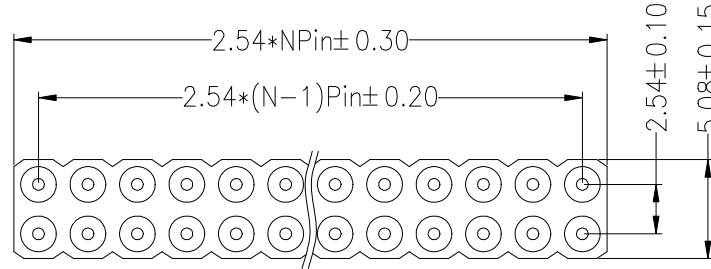

Ordering Information


3610 30 2 XX S XX 119 XX

No.of Pins Per Row NPin N=02~40

Contact Plating
 G1:1U" Gold
 G2:1.5U" Gold
 G3:2U" Gold
 G4:3U" Gold
 G5:5U" Gold
 S0:Gold Flash/Tin
 SN:Tin

Length 119=11.96mm

Stream code

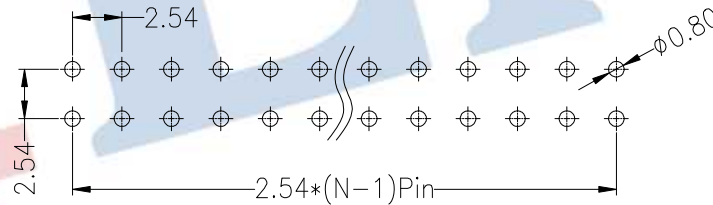

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

| | | | | | | | | | | | | |
|-----|------------|--------------------------|--|-----------|-------|---------|----------|------------|-------|---|--|--|
| | | | | OPERATION | | DRAW | Wei Chen | 2021.04.01 | SCALE | FIT | JILN® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588 | |
| | | | | X.X | ±0.30 | | | | UNIT | mm | | |
| | | | | X.XX | ±0.20 | CHECK | SIZE | A4 | | | | |
| | | | | X.XXX | ±0.10 | APPROVE | | SHEET | 1/1 | PART NO. | 3610302XXSXX119XX | |
| A0 | 2021.04.01 | NEW DRAWING | | Angle | ±3° | | | | PROJ. | TITLE: 2.54x3.0 双排双头针 L=11.96 上针尖0.60 下针尖0.50 | | |
| REV | DATE | MODIFICATION DESCRIPTION | | CHANGE | DIM | TOL | | | | | | |