

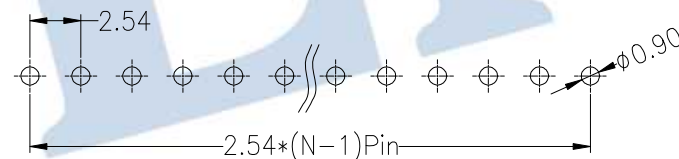


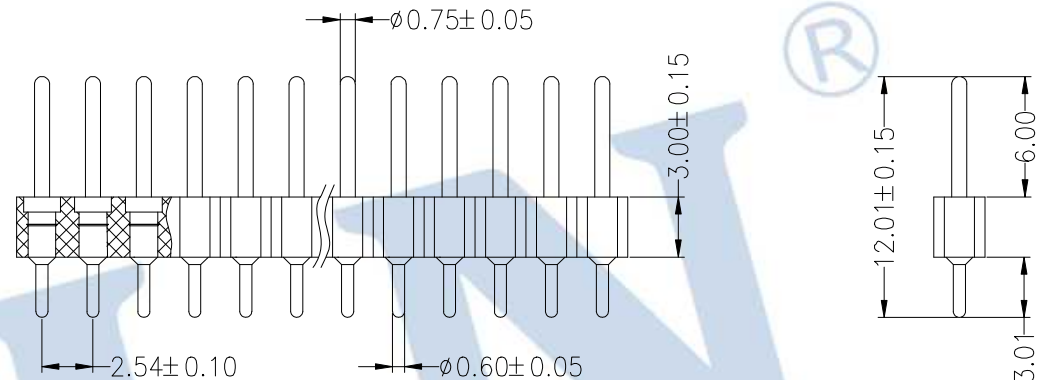

**SPECIFICATIONS**

Current Rating:3.0AMP  
 Contact Resistance:10mΩ Max  
 Dielectric Strength:Min 1000V AC RMS  
 Operation Temperature:-40°C to +105°C

Contact Material:Brass  
 Contact Plating:Au Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PPS  
 Soldering Temperature:260°C±5°C For 5~10 Second

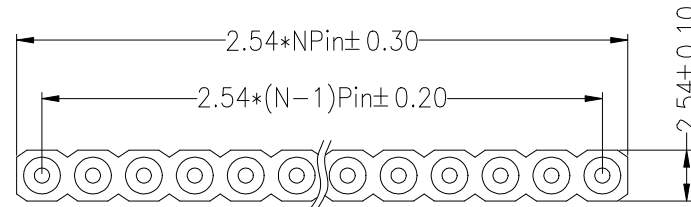

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

**Ordering Information**

**3610 30 1 XX S XX 120 XX**

No.of Pins NPin N=02~40  
 Contact Plating  
 G1:1U" Gold  
 G2:1.5U" Gold  
 G3:2U" Gold  
 G4:3U" Gold  
 G5:5U" Gold  
 S0:Gold Flash/Tin  
 SN:Tin  
 Pin Length 120=12.01mm  
 Stream code

				OPERATION		DRAW	Wei Chen	2022.05.21	SCALE	FIT	<b>JILN</b> ® 深圳市锦凌电子有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483253 Fax: 86-755-2997-5588	
				X.X	±0.30				UNIT	mm		
				X.XX	±0.20	CHECK			SIZE	A4	PART NO.	3610301XXSXX120XX
				X.XXX	±0.10		SHEET	1/1				
A0	2022.05.21	NEW DRAWING		Angle	±3°	APPROVE			PROJ.		TITLE:	2.54x3.0 单排双头针 L=12.01 上针尖0.75 下针尖0.60
REV	DATE	MODIFICATION DESCRIPTION		DIM	TOL							